

SCIENCE, SOCIETY, PROGRESS

PROCEEDINGS OF ARTICLES THE INTERNATIONAL SCIENTIFIC CONFERENCE
CZECH REPUBLIC, KARLOVY VARY - RUSSIA, MOSCOW, JULY 29-30, 2017



Science, society, progress

Proceedings of articles the international scientific conference

Czech Republic, Karlovy Vary - Russia, Moscow, July 29-30, 2017

Czech Republic, Karlovy Vary - Russia, Kirov, 2017

UDC 001
BBK 72
N 76

Scientific editors:

Dubovik Majja Valerianovna, Doctor Economics, Professor, Russian Economic University named G.V.Plehanov
Gurieva Svetlana Dzahotovna, Doctor of Psychology, Professor, St. Petersburg State University
Adamov Aleksej Konstantinovich, Doctor of Medical Sciences, Professor of the Department of Philosophy,
Povolzhsky Institute of Management named after PA Stolypin
Mel'nikov Jurij Borisovich, PHD, Associate Professor, Head of the Department, Ural State Economic University, Ural
Federal University

N 76 Science, society, progress: Proceedings of articles the international scientific conference. Czech Republic, Karlovy Vary - Russia, Moscow, July 29-30, 2017 [Electronic resource] / Editors prof. M.V. Dubovik, S.D. Gurieva, A.K. Adamov, Ju.B. Mel'nikov. – Electron. txt. d. (1 file 4.4 MB). – Czech Republic, Karlovy Vary: Skleněný Můstek – Russia, Kirov: MCNIP, 2017. – ISBN 978-80-7534-148-8 + ISBN 978-5-00090-124-3.

Proceedings includes materials of the international scientific conference «Science, society, progress», held in Czech Republic, Karlovy Vary-Russia, Moscow, July 29-30, 2017. The main objective of the conference - the development community of scholars and practitioners in various fields of science. Conference was attended by scientists and experts from Bulgaria, Kazakhstan, Kyrgyzstan, Russia. International scientific conference was supported by the publishing house of the International Centre of research projects.

ISBN 978-80-7534-148-8 (Skleněný Můstek, Karlovy Vary, Czech Republic)
ISBN 978-5-00090-124-3 (MCNIP LLC, Kirov, Russian Federation)

Articles are published in author's edition. Editorial opinion may not coincide with the views of the
authors

Reproduction of any materials collection is carried out to resolve the editorial board

© Skleněný Můstek, 2017
© MCNIP LLC, 2017

Table of Contents

Section 1. Physics and Mathematics	8
Eremichev A.N. Results of tests on the uniform three axial tensile.....	9
Section 2. Chemistry.....	18
Кукушкин А.А., Бондарь П.Н., Любяшкин А.В., Товбис М.С. Фунгицидная активность полностью замещенных аминифенолов с γ -пиридиновым заместителем.....	19
Кудрявцева Т.Н., Сысоев П.И., Кометиани И.Б., Рида Р.С.А., Климова Л.Г. Синтез и некоторые свойства 2-(6Н-индоло[2,3- <i>b</i>]хиноксалин-6-ил)-1-фенилэтанона	25
Section 3. Technology.....	29
Ларин В.П., Новиков А.Е. Информационное обеспечение технологического проектирования производственного контроля РЭА..	30
Малявина Е.Г., Фролова А.А. Экономическая оценка теплозащиты офисного здания.....	46
Осовецкий Л.Г. Аналогия эволюции информационных систем живых организмов с эволюцией технических информационных технологий...	54
Section 4. Agriculture	59
Окорков В.В. Модели по влиянию удобрений на продуктивность севооборота на серых лесных почвах Верхневолжья	60
Section 5. Economics	77
Дубовик М.В., Чередниченко Л.Г. Конкурентная стратегия России в «новой экономической нормальности».....	78

Иванова Н.В., Бурак П.А., Подклетнов Д.К. Инновации в обучении и поддержка уровней знаний специалистов в мире Индустрии 4.0	89
Иванова Е.А., Иванова Д.А. Низкозатратный способ стимулирования использования электромобилей в г. Москве за счет развития малой энергетики	83
Markaryan V.R. The true reasons of prices' growth in Russia. Is it inflation demand or suggestions' inflation?	89
Мельников Ю.Б., Онохина Е.А., Шитиков С.А. Моделирование системы запросов в системе управления	102
Резник Е.А. Повышение эффективности деятельности предприятия на основе учета и анализа затрат на качество	114
Саенко Ж.Э. Сравнительная характеристика подходов к определению понятий «основные средства», «основные фонды», «основной капитал»	124
Чередниченко Л.Г., Ермолаев С.А. Показатели конкурентоспособности как факторы эффективности	131
Section 6. Philosophy	137
Адамов А.К. Философское обоснование организации экологически безопасной среды обитания людей	138
Мельникова М.А. Полемика И. Валлерстайна и Дж. Абу-Луход относительно проблемы методологии исторического познания в миросистемном подходе	160
Потамская В.П. Проблема исторической репрезентации в философии А. Данто	164
Сергеева М.А. Психоанализ: от врачебного метода к философской доктрине	169
Section 7. Philology	183

Агаркова О.А. Татарский и казахский языки в полиязычном Оренбуржье	184
Section 8. Pedagogy	190
Antonova N.V., Fomina L.V. Faculty development as the basis for students' development	191
Еременко Э.А. Развитие чувства цвета у младших школьников на уроках изобразительного искусства	197
Панфилова О.И. Результаты исследования профессиональной компетентности педагогов в воспитательной деятельности общеобразовательных организаций	203
Петрова Н.Ю. Критерия формирования коммуникативной компетентности школьников на занятиях изобразительным искусством	212
Шитова И.Ю., Гончарова В.П. Научно исследовательская работа глазами студентов Крымского федерального университета имени В. И. Вернадского (результаты пилотажного исследования)	218
Section 9. Medicine	229
Boyadzhieva E., Zagorchev P., Filipov I. Assessment of endodontic leakage of bioceramic sealer using methylene blue fluid filtration method.....	230
Бреусенко В.Г., Шевченко Н.А., Мишиева О.И., Есипова И.А., Чмыр Е.Н., Плахова Т.А., Ковалева О.С. Доброкачественные процессы эндометрия в постменопаузе. Эффективность микроволновой аблации эндометрия ..	239
Section 10. Psychology	254
Gurieva S.D. The psychological indicators of social inclusion and exclusion in ethnic relations.....	255
Ткачева Л.О., Павловская И.Ю., Седёлкина Ю.Г, Наследов А.Д. Исследование опознания звукоизобразительных слов английского языка с использованием методики «лексическое решение»	264

Section 11. Sociology.....270

Захарова Е.М. Репродуктивные установки современных российских студентов 271

Поздеева Е.Г. Индивидуализация выбора в системе факторов удовлетворенности образованием в ВУЗе..... 274

Section 12. Cultural Studies.....278

Малкова Н.Ю. Качественные методы в культурологии..... 279

SECTION 1.

PHYSICS AND

MATHEMATICS

RESULTS OF TESTS ON THE UNIFORM THREE AXIAL TENSILE

EREMICHEV A.N.

N.CYPRUS, UNIVERSITY MEDITERRANIAN KARPASIA

Abstract. To determine the surface of strength [1], of great importance is the "starting point" which is determined by the results of tests on

- a. a uniform all-round compression and
- b. all-round uniform tension.

The first definition is rather trivial, although associated with greater technical difficulties when creating the higher pressure at which the material collapses under compression. The creation of the stress state "all-round uniform tension" and especially the measurement of breaking stress at the same time is a complex scientific and engineering task.

A brief review of articles on the subject. The sample and the device for three axial tension developed by the author are described. The results of tests of samples of plexiglass and carbon-carbon composite material are given.

Key words: Samples for testing, all-round uniform tension, uniform three axial tension, finite element method, the postulate of Drucker, plexiglass, carbon-carbon composite material.

Аннотация. При определении поверхности прочности [1], большое значение имеют «начальные точки» определяемые по результатам испытаний

- а. на равномерное всестороннее сжатие и
- б. на равномерное всестороннее растяжение.

Определение первых достаточно тривиально, хотя и связано с большими техническими трудностями при создании больших давлений при которых разрушается материал при сжатии. Создание же напряженного состояния «равномерное трехосное растяжение» и особенно измерение разрушающего

усилия при этом, представляет собой сложную инженерную задачу. Один из способов её решения -это создание равномерного трехосного растяжения. В работе рассматриваются устройство и образец для испытаний на равномерное трехосное растяжение. Приведен краткий обзор работ, посвященных данному вопросу. Приведены результаты испытаний на равномерное трехосное растяжение образцов из оргстекла и углерод-углерод композиционного материала.

Ключевые слова: Образцы для испытаний, всестороннее равномерное растяжение, равномерное трехосное растяжение, метод конечного элемента, постулат Друкера, плексигласс, углерод-углеродный композитный материал.

To determine the surface of strength [1], of great importance is the "starting point" which is determined by the results of tests on

- a. a uniform all-round compression and
- b. a all-round uniform tension.

The first definition is rather trivial, although associated with greater technical difficulties when creating the higher pressure at which the material collapses under compression. The creation of the stress state "all-round uniform tension" and especially the measurement of breaking stress at the same time, is a complex engineering task.

One of the greatest scientists and educators in the field of strength of materials Feodosiev V. I. in the book [2] wrote:

“The only one method of the all-round homogeneous tension known at present time is the following:

“The previously cooled solid homogeneous ball is quickly heated. The stress state indicated above will occur in the ball center. Unfortunately this method is not suitable for investigation of material properties under this state stress, for example for determining the so-called rupture characteristic”.

This method was used by modern scholars [3]. Obviously are the difficulties to define specific values of the limit of the all-round tensile strength. Strength at

all-round uniform tension in [3] is determined indirectly by finite element method (FEM).

Lately many works have been written which address the issues associated with the testing of materials under three axial tension. A review of these works is beyond the scope of this article. However, a large number of such works testify the importance of studying the properties of materials with uniform three-axis tensile.

One of the ways to create a stress state almost exactly like all-round uniform tension is applied along three mutually perpendicular axes uniform tensile forces. The stress state arising from this can be called a uniform three axial tension (UTAT). The description of the device and the sample for the project are described in the article. In conclusion, the results of tests of samples of plexiglass and carbon-carbon composite material (CCCM) are given.

1. The author was offered a device which allowed to test in three axial tension using a standard testing machine [4] and a sample for such tests [5].

Detailed description the device is in [4]. The device is shown in Fig.1.

The advantage of the device is that the load increases proportionally on all three axes. If you set the same move at the top and bottom of the device (Fig. 1) which is possible with modern test machines, the center of the sample remains stationary.

The sample for uniform all-round tension [5] is developed in the form of a cube, having in the middle of each edge of the groove (Fig. 2). The grooves restrict the area of comprehensive stretching. As shown by the results of the experiments, the fracture surface passes through this area and does not affect the part of the sample in contact with the grip.

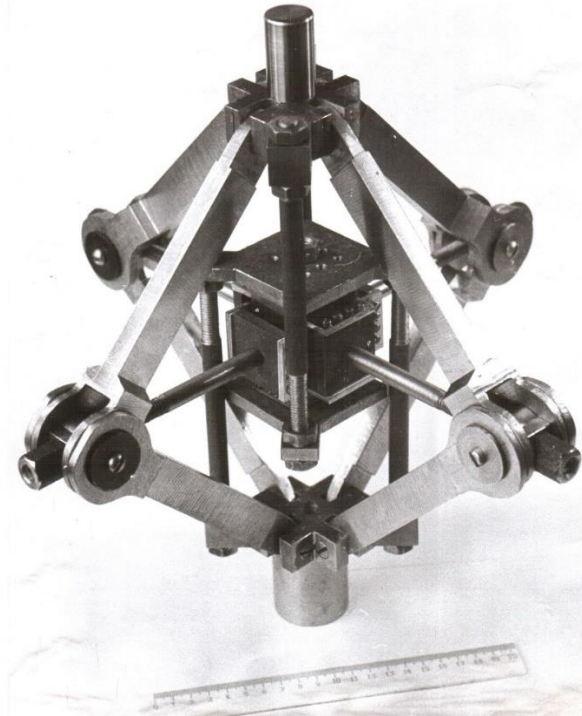


Fig.1. Device for three axial tension

The shape and size of the sample chosen from the following simplified considerations.

Width b and depth c of the grooves in the sample should be such that the failure of the specimen occurred in the middle part of the tensile stress, not shear due to the impact of grippers of device.

Calculating the tensile stress in the center of the specimen and shear stress of capture and considering that most of the material breaking stress in shear is approximately half the breaking stress in tension will get

$$a > 4c - b, \quad r \leq \frac{c}{2}.$$

More accurately the stress-strain state of the sample and final clarification of its size were made in [5] by FEM. The calculations were made for the samples with different sizes. Selection criteria of the final sample size was that to ensure the

least stress concentration in the working area of the sample near its center (uniform three axial tension, and the virtual absence of shear stresses).

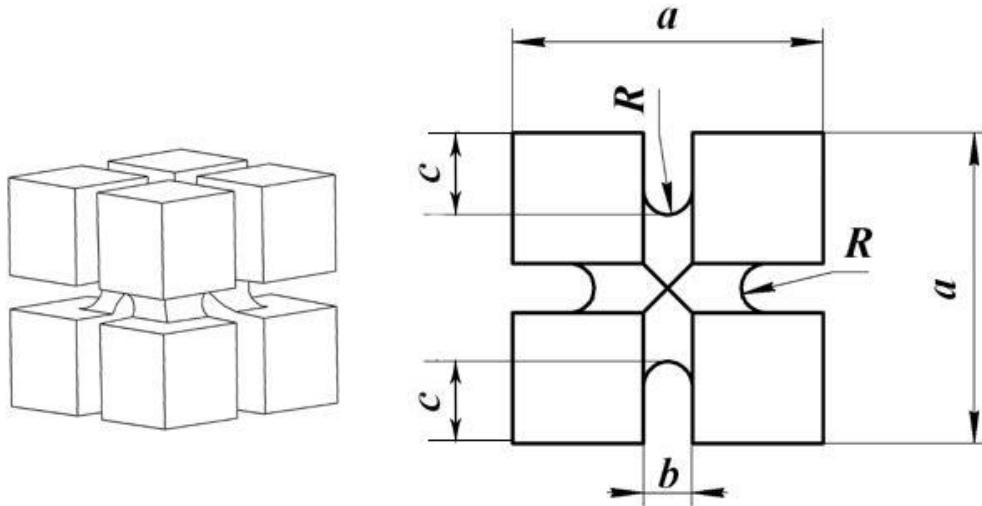


Fig. 2. The sample for the three axial tension

The allowable deviation from UTAT is equals no more than 10%. For a sample with optimal size in UTAT stressed state is about 40% of the working area of the sample. Tensile stress in each of the three axes was $0.86\sigma_{ii}$, where

$$\sigma_{ii} = \frac{F}{(a-2c)^2} ,$$

F - the tensile force acting on each of the three axes.

Therefore, the stress on the central section of the specimen differs only 14% different from the average stress σ_{ii} .

In samples with other dimensions this deference of tensile stress in the center of sample and also the stress concentration are greater.

The calculation was carried out in an elastic medium. For real materials, which at the time of destruction will have faced significant plastic deformation, stress concentrations will be lower.

The final specimen dimensions was selected as follows (Fig.2)

$$\frac{a}{10} \leq c \leq \frac{a}{7}; \quad \frac{a}{9} \leq b \leq \frac{a}{7}; \quad \frac{b}{5} \leq r \leq \frac{b}{2}.$$

2. In the first stage of experimental investigations the tests were carried out for an isotropic material. The object of the study was chosen to be plexiglass, supplied in sheets with a thickness of 50 mm. Series of samples (7 pieces) with the following dimensions were produced

$$a=38,0 \text{ mm}, \quad b=8,0 \text{ mm}, \quad c=8,5 \text{ mm}, \quad r=4,0 \text{ mm}.$$

The tests were carried out using the device [3] (Fig.1) on the serial testing machines FMG-200 at the velocity of the grippers of the machine of 0.2 mm/sec. Average results of test UTAT series samples are given in the table 1.

Table 1

The type of stress state	Ultimate Strength σ^U [MPa]	Energy [Joules]
Uniform three axes tension UTAT	9,79	14,41
Uniaxial tension UAT	13,60	7,45

For comparison, the same series (7 pieces) of samples were tested with the use of the same device under the conditions uniaxial tension (UAT). In this case the grippers of the device was attached only to two opposite sides of the cubic sample. The results are shown in the third row of the table. Thus the comparison of test results of samples of UTAT and UAT becomes correct, since errors of transmission of forces through the device, stress concentration, etc. for different types of tests are almost the same.

The destruction of all samples occurred in the working area and not at the area of attachment of the grips, which indicates their suitability.

For all the samples as in UTAT and in UAT by using the diagram of the apparatus of the testing machine were recorded the diagram "force- move of grips of testing machine". As these diagrams for all samples were linear, then the energy of rupture of the sample can be calculated as half of the product of maximum force by the move of the grip. The average value (7 pieces) of this energy is given in the last column of the table.

For discussion of the obtained results let us consider an isotropic material with equal strength in all three axes σ^U . Plexiglass is such a material. The time of the destruction at uniaxial tension is depicted by points lying on the axes of a rectangular coordinate system $\sigma^U, 0, 0; 0, \sigma^U, 0; 0, 0, \sigma^U$. The postulate of Drucker, says that the surface of plasticity should not be sunken [1]. By analogy we can assume that the surface of strength should also not be sunken. In the limiting case, this may be the plane passing through the above point. The case of UTAT would correspond to a beam having equal angles with all three axes. By simple geometry it can be shown that the ultimate strength under UTAT σ_{UTAT}^U is $\sqrt{3} = 1,73$ times less than in uniaxial tension.

$$\sigma_{UAT}^U / \sigma_{UTAT}^U = 1,73$$

Again, note that the above is the case if the surface strength flat.

The results given in table show that

$$\sigma_{UAT}^U / \sigma_{UTAT}^U = 1,39$$

which indicates either an error of the results of the experiments or of the fact that the surface of strength are slightly convex.

A very important result which is in need of further reflection and discussion is that. Despite the lower strength of the samples at UTAT than UAT accumulated sample energy to the point of destruction in the first case were almost two times greater. This indirectly suggests that in the case of UTAT energy failure criteria may be more preferable.

The main conclusions of this article coincide with the content of our publications.

3. In a similar way, tests were carried out with two series of samples of carbon-carbon composite material (CCCM) of the type 3D. The first series had the size

$$a=38,0 \text{ mm}, \quad b=8,0 \text{ mm}, \quad c=10,0 \text{ mm}, \quad r=4,0 \text{ mm}.$$

and the second

$$a=38,0 \text{ mm}, \quad b=6,0 \text{ mm}, \quad c=6,3 \text{ mm}, \quad r=3,0 \text{ mm}.$$

Samples of the first series were almost the same as tested earlier plexiglas samples. For CCCM the depth and width of the groove led to the destruction of the sample not at the working area, and to the "puckering" of the carbon fibers of those parts of the sample, which is attached to the gripper of device. It is associated with a significantly lower binding strength compared with the strength of carbon fiber. The destructive stress in this case was very little of 0,507 MPa to 0,863 MPa.

The second series of samples from CCCM have reduced width and depth of grooves. This has led to the growth of destructive stresses almost 20 fold. However, in this case, the destruction of the samples occurred not in the working area. Observed cracking close to one of the grips of the device. Stresses in the working area of the sample at this point was approximately 25% of the tensile strength CCCM under uniaxial tension.

Thus, the task to determine the strength under three axial tension CCCM at this stage of the work failed. In our opinion it is necessary to increase the size of samples a and a relative decrease in the depth c and width b of groove. It is connected with great difficulties due to the high value of the samples CCCM and the limited capacity of the test equipment.

4. Conclusion

The device and the sample, which can be successfully applied to study the properties of materials under three axial tensile were developed.

The proposed method of test for three axial tension can be successfully applied to orthotropic materials such as plexiglass.

The use of the above described methods for investigation of materials like CCCM requires further development. It is necessary to increase the size a of samples and a relative decrease in the depth c and width b of groove.

References:

1. Wu H.-C. Continuum Mechanics and Plasticity. Chapman & Hall/CRC Press, 2005. – 684 p.
2. Feodosiev V.I. Advanced Stress and Stability Analysis, Springer-Verlag Berlin Heidelberg, 2005- 421p.
3. V. Doquet , N. Ben Ali, A. Constantinescu, X. Boutillon Fracture of a borosilicate glass under triaxial tension, Mechanics of Materials, 57 (2013), 15–29
4. Eremichev A.N. Test device for uniform triaxial tensile, Pat. SU №1499170 A1 G01 N 3/32 (1989) (in Russian)
5. Eremichev A.N. and others. The specimen for testing at uniform triaxial tension, Pat. SU №1762165 A1 G01 N 3/00 (1992) (in Russian)

Список литературы:

1. Wu H.-C. Continuum Mechanics and Plasticity. Chapman & Hall/CRC Press, 2005. – 684 p.
2. Feodosiev V.I. Advanced Stress and Stability Analysis, Springer-Verlag Berlin Heidelberg, 2005- 421p.
3. V. Doquet , N. Ben Ali, A. Constantinescu, X. Boutillon Fracture of a borosilicate glass under three axial tension, Mechanics of Materials, 57 (2013), 15–29 p.
4. Еремичев А.Н. Устройство для испытаний на трехосное растяжение. Авторское свидетельство SU №1499170 A1 G01 N 3/32 (1989)
5. Еремичев А.Н. и другие. Образец для испытаний на равномерное трехосное растяжение. Авторское свидетельство SU №1762165 A1 G01 N 3/00 (1992)

SECTION 2.

CHEMISTRY

ФУНГИЦИДНАЯ АКТИВНОСТЬ ПОЛНОСТЬЮ ЗАМЕЩЕННЫХ АМИНОФЕНОЛОВ С Г- ПИРИДИНОВЫМ ЗАМЕСТИТЕЛЕМ

Кукушкин А.А., Бондарь П.Н., Любяшкин А.В., Товбис М.С.

Россия, СИБИРСКИЙ ГОСУДАРСТВЕННЫЙ УНИВЕРСИТЕТ НАУКИ И ТЕХНОЛОГИЙ ИМ.
АКАДЕМИКА М.Ф. РЕШЕТНЕВА

Аннотация. Существуют полностью замещенные аминофенолы со сложноэфирными группами и метильными заместителями в кольце. Для таких соединений ранее определяли бактериостатическую активность и бактерицидное действие. В настоящей работе впервые изучено влияние нового синтезированного аминофенола, 2,6-ди(этоксикарбонил)-3-метил-5-пиридин-4-ил-4-аминофенола, содержащего одновременно этоксикарбонильные группы и γ -пиридиновый заместитель в ароматическом ядре на грибы рода *Trichoderma asperellum*. Строение было доказано современными физико-химическими методами анализа. Установлено, что изучаемый аминофенол ингибирует рост грибов рода *Trichoderma asperellum*.

Ключевые слова: перзамещенный аминофенол, пиридиновый заместитель, биологическая активность, фунгицидная активность, *Trichoderma*.

Abstract. There are persubstituted aminophenols with ester groups and methyl substituents in the ring. For such compounds has previously determined the bacteriostatic activity and bactericidal action. In the present work, we first studied the effect of a new synthesized aminophenol, 2,6-di(ethoxycarbonyl)-3-methyl-5-pyridine-4-yl-4-aminophenol containing both ethoxycarbonyl group and γ -pyridine substituent in the aromatic ring on the fungi of the genus *Trichoderma asperellum*. The structure was proved by modern physical methods of analysis. Established that the studied aminophenol inhibits the growth of fungi of the genus *Trichoderma asperellum*.

Keywords: persubstituted para-nitrosophenol, pyridine substituent, biological activity, antifungal activity, *Trichoderma*.

В Сибири имеются огромные насаждения хвойных деревьев, в том числе и хозяйственно ценной породы – сосны обыкновенной (*Pinus sylvestris* L.). Во время роста древесные виды подвергаются влиянию различных факторов окружающей среды. Одной из наиболее значимых угроз для состояния лесов являются бактериальные и грибковые заболевания, которые могут быть причиной гибели хвойных насаждений.

Несмотря на вышесказанное, важной проблемой является не столько поражение многолетних растений, сколько гибель семян, в частности, хвойных пород во время выращивания в лесничествах, в таких масштабах, что становится материально неоправданным разведение посадочного материала [1].

Основным способом защиты выращиваемого материала хвойных пород от болезней в лесных питомниках является обработка фунгицидными и бактерицидными препаратами. Одним из недостатков данного способа является приспособляемость возбудителей болезней к таким препаратам при ежегодном использовании; помимо этого, с течением времени, в результате мутаций появляются новые, не чувствительные к применяемым веществам, но столь же активные виды патогенов. В связи с этим очень важной становится задача увеличения спектра новых прогрессивных слаботоксичных фунгицидов и бактерицидов для борьбы с болезнями растений, а также исследование действия новых соединений на широко распространенных в природе возбудителей болезней [2].

В представленной работе приведены данные по синтезу новых полностью замещенных 4-аминофенолов с γ -пиридилным заместителем. Известно, что различные производные аминофенолов обладают сильным бактерицидным и фунгицидным действием [3]. Это позволяет предполагать наличие бактерицидной и фунгицидной активности и у новых, не